



TF Veranda & Comfy Veranda Assembly Manual



ADJUST YOUR SUN

Comfy CAMELLIA

IMPORTANT

Please read these instructions carefully before you start to assemble this greenhouse.
Please carry out the steps in the order set out in these instructions.
Keep these instructions in a safe place for future reference.

Care and Safety advice

- * Please follow the instructions as listed in this manual.
- * Sort the parts and check the list of contents.
- * For safety purposes we strongly recommend that the product will be assembled by at least two people.
- * Some parts have metal edges. Please be careful when handling components.
- * Always wear gloves, shoes and safety goggles during assembly.
- * Do not attempt to assemble the product in windy or wet conditions.
- * Dispose of all plastic bags safely - keep them out of reach of small children.
- * Keep children away from the assembly area.
- * Do not attempt to assemble the product if you are tired, have taken drugs, medications or alcohol, or if you are prone to dizzy spells.
- * When using a stepladder or power tools, ensure that you follow the manufacturer's safety advice.
- * Do not climb or stand on the roof.
- * Heavy articles should not be leaned against the poles.
- * Do not hang or lay on the profiles.
- * Please consult your local authorities if any permits are required to construct the product.
- * Keep roof and gutter clean of snow, dirt & leaves.
- * Heavy amounts of snow on roof can damage the product making it unsafe to stand below or nearby.
- * This product was designed and produced to be a patio cover only.

MAINTENANCE NOTES

1. In case of a defective or damaged part, or for any other questions concerning the product, please contact the manufacturer directly.
2. Please have the parts list and part numbers on hand when ordering or requesting replacement parts.
3. When cleaning, use mild soap or detergent, warm water, and a washcloth or sponge.
4. While the product is designed for 4 seasons use, it is strongly recommended to clear snow from the roof on a regular basis.

LIMITATIONS ON THE WARRANTY

1. The product is not warranted against damages due to vandalism, abuse, or falling or thrown objects.
2. The product is not warranted against damages due to extreme weather conditions, such as thunderstorms, hail, strong wind or snow storms, or any other acts of God.
3. The product is only warranted in the event it is installed in accordance with the Transpa Forza written instructions enclosed with the product.
4. The product is not warranted in the event it has been improperly anchored.

Please Note:

Transpa Forza accept no responsibility for any injury or consequential damage caused by the use of unsuitable fixings or by the installation of the product that deviates in any way from that described herein. Homestyle Multi-purpose Canopies are designed to withstand a loading of 60 K/pa m² which is suitable for most domestic applications. If you are installing the canopy in an exposed location please call the helpline before you commence.

Before proceeding with the assembly please ensure that the following conditions have been met:

The wall is of solid construction – no flaking mortar or loose bricks (check with a registered builder if unsure).

You have the correct fixings for the type of wall that you are installing the canopy onto. (Please note, no wall fixings are included)

Check that you have sufficient space for the installation.

Due to the weight of the product and the nature of installation TWO people with appropriate step ladders

LIMITATIONS ON THE WARRANTY


1. The product is not warranted against damages due to vandalism, abuse, or falling or thrown objects.
2. The product is not warranted against damages due to extreme weather conditions, such as thunderstorms, hail, strong wind or snow storms, or any other acts of God.
3. The product is only warranted in the event it is installed in accordance with the Transpa Forza written instructions enclosed with the product.
4. The product is not warranted in the event it has been improperly fixed.
5. While the product is designed for 4 seasons use, it is strongly recommended to clear snow from the roof on a regular basis.

Wall Connection



Align the wall profile with spirit level

Drill the wall and then screwed with the screw V1

TRANSPAFORZA®

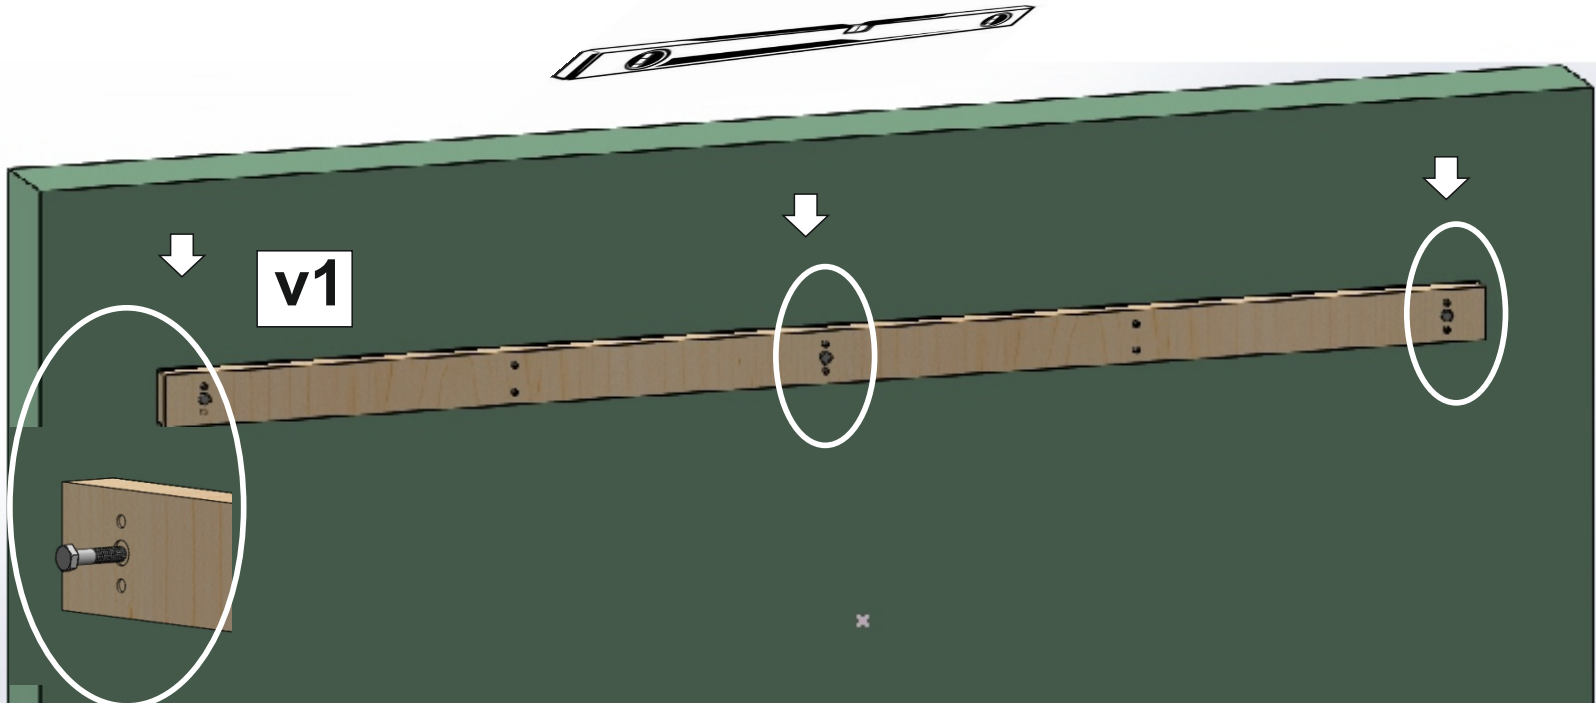




Screw the flange to the wall support profile with the screw V5

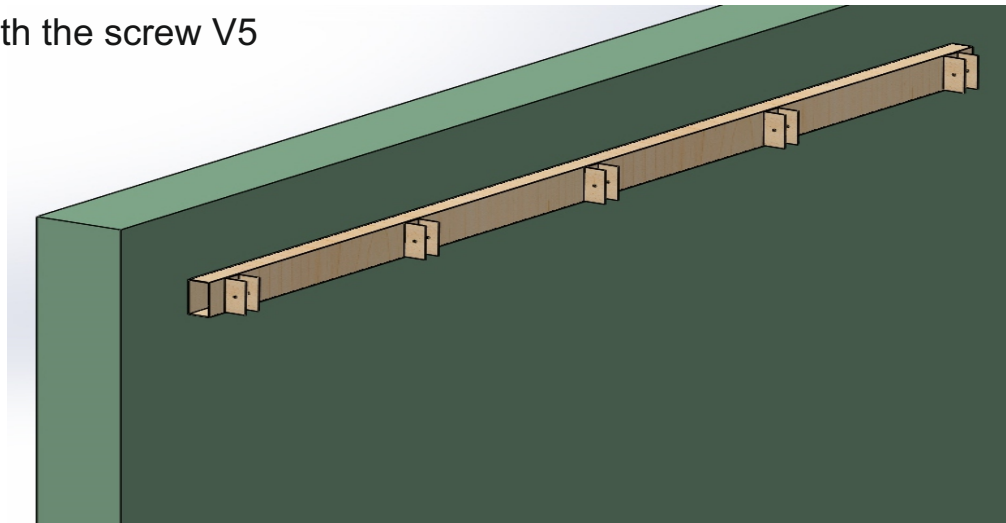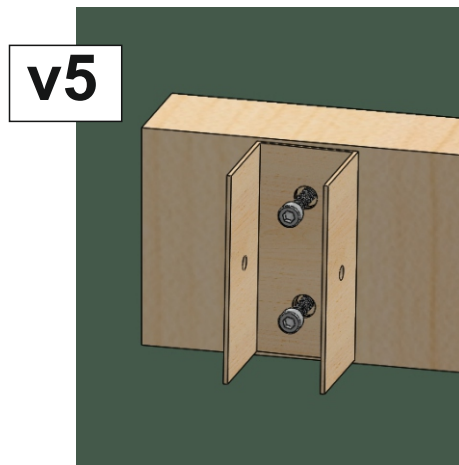

Installation of carrier profiles



TRANSPAFORZA®

Screw the flange to the wall support profile with the screw V5

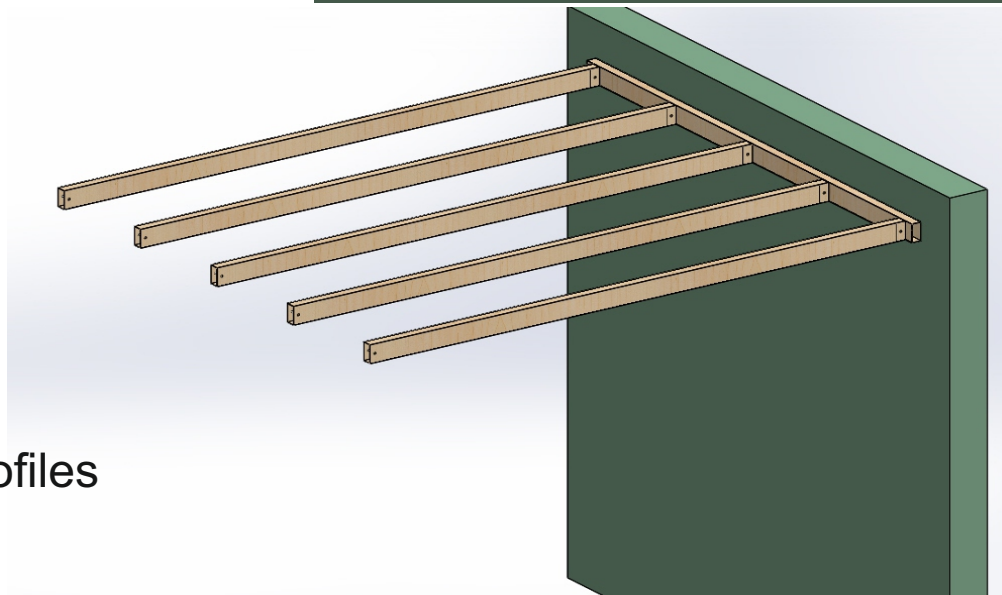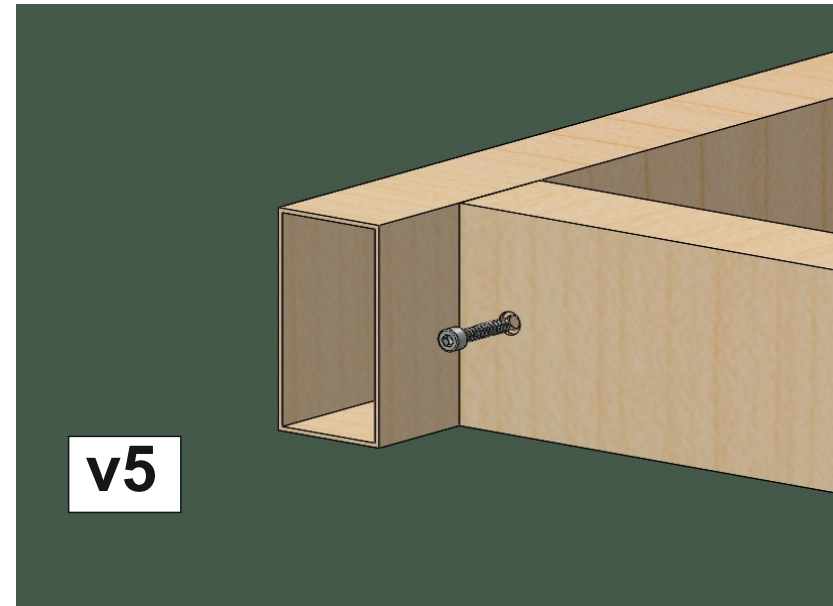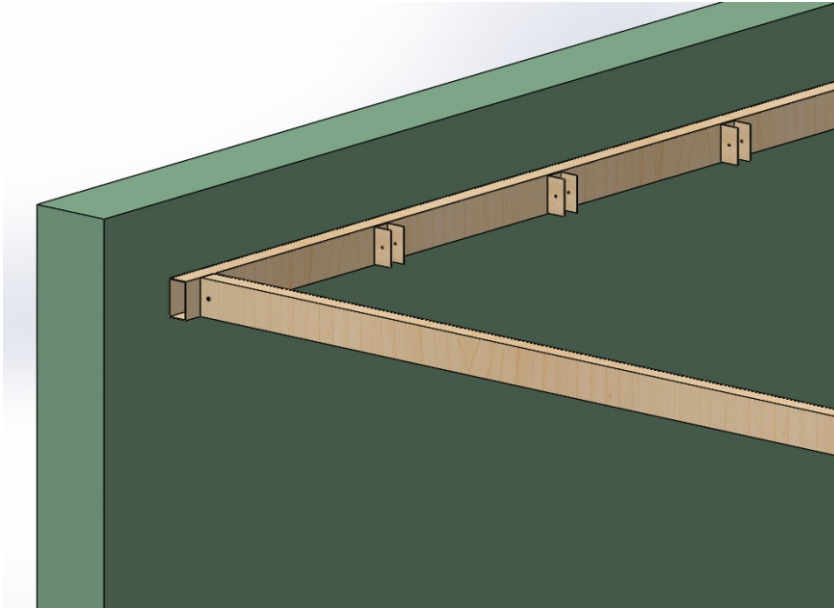



Repeat the same for all profiles

Installations of post base ,
screw the base to the ground with V6

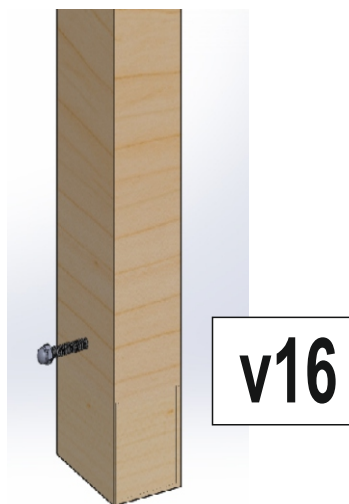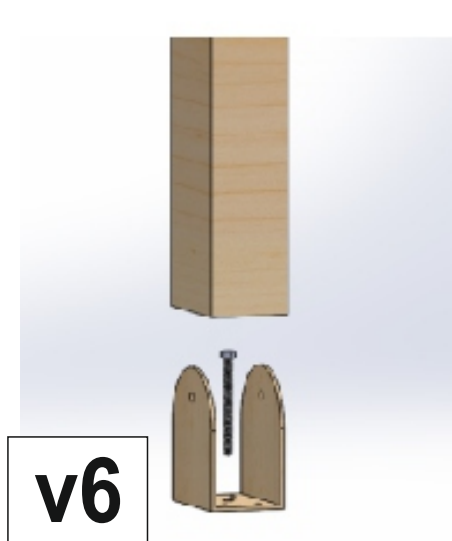

Place the post profile to the base ,
screw it with V 16


Installation of front support profile ,to the post profile

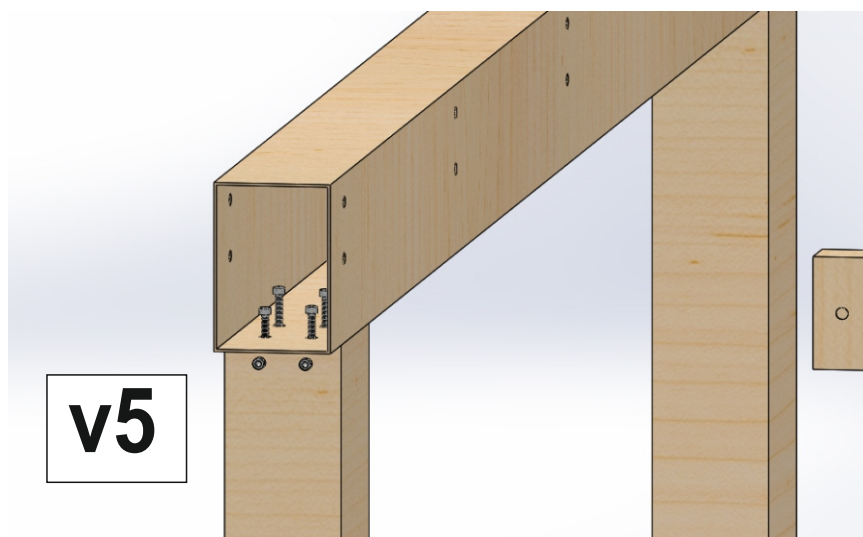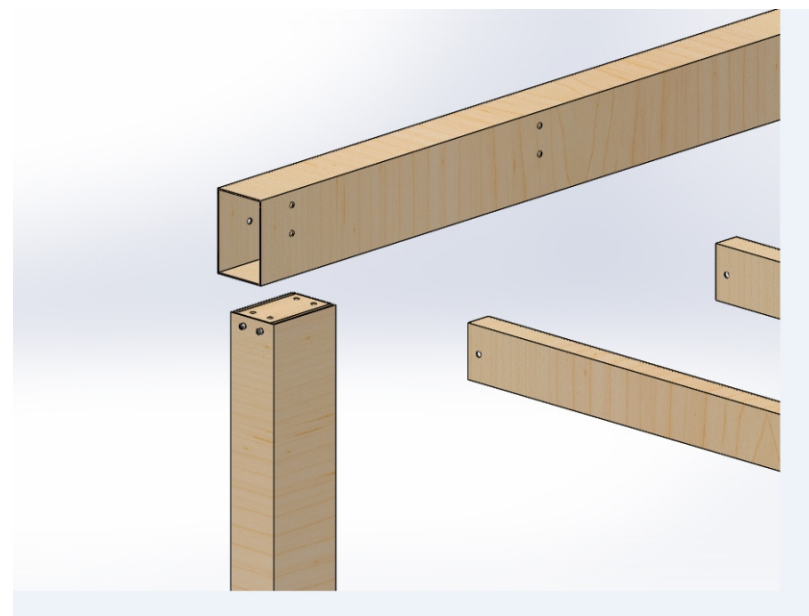



Screw the front carrier profile to the post profile with the screw V5

TRANSPAFORZA®


Front Profile Flange

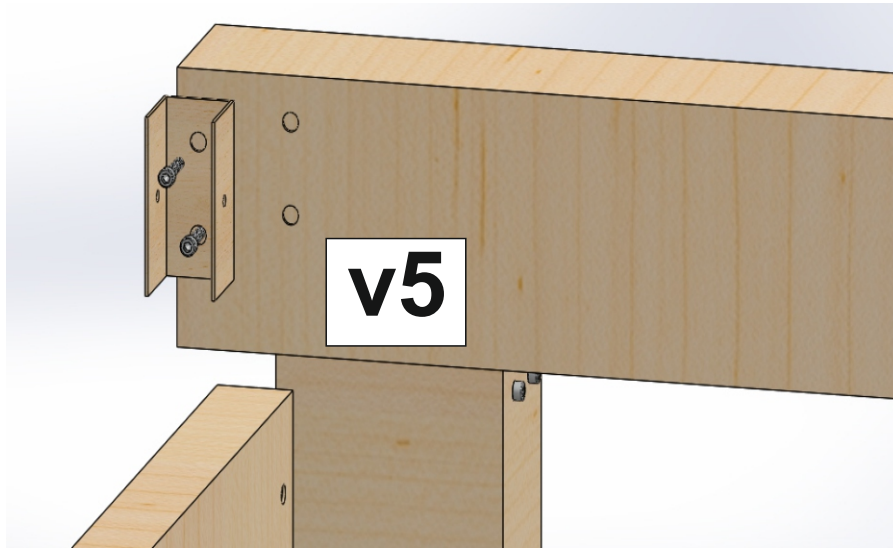


Screw to front carrier profile the flange with the screw V5

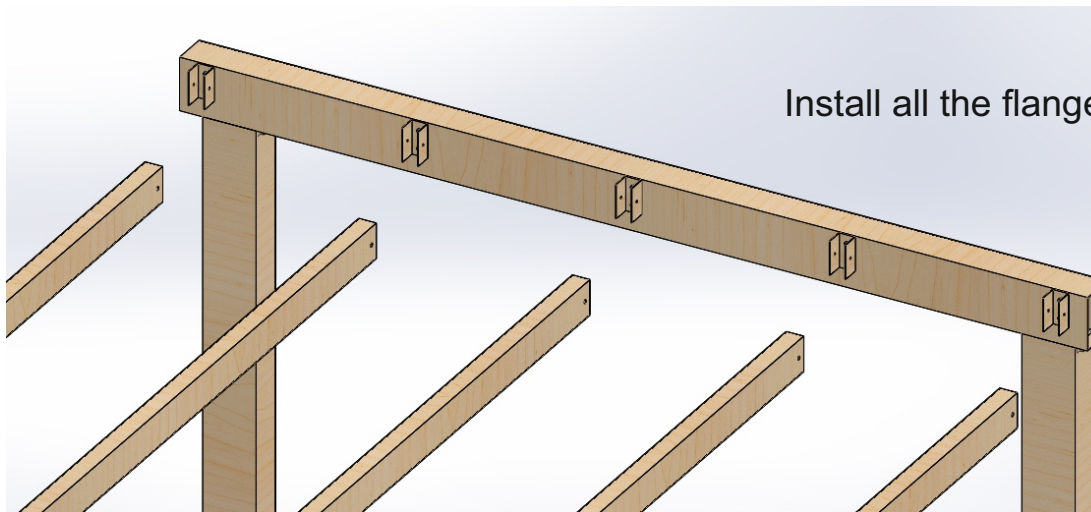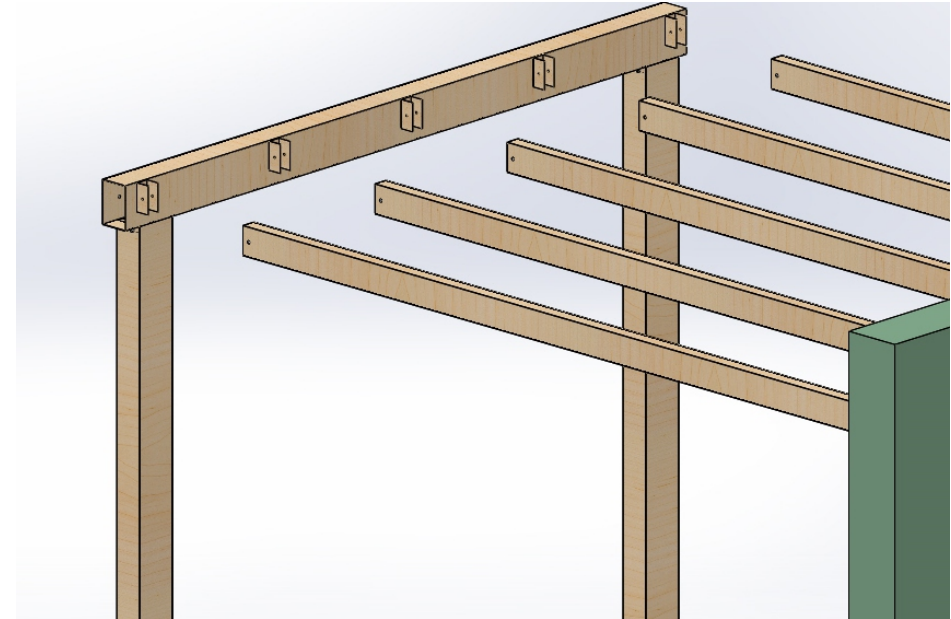


Install all the flanges to the front carrier profile


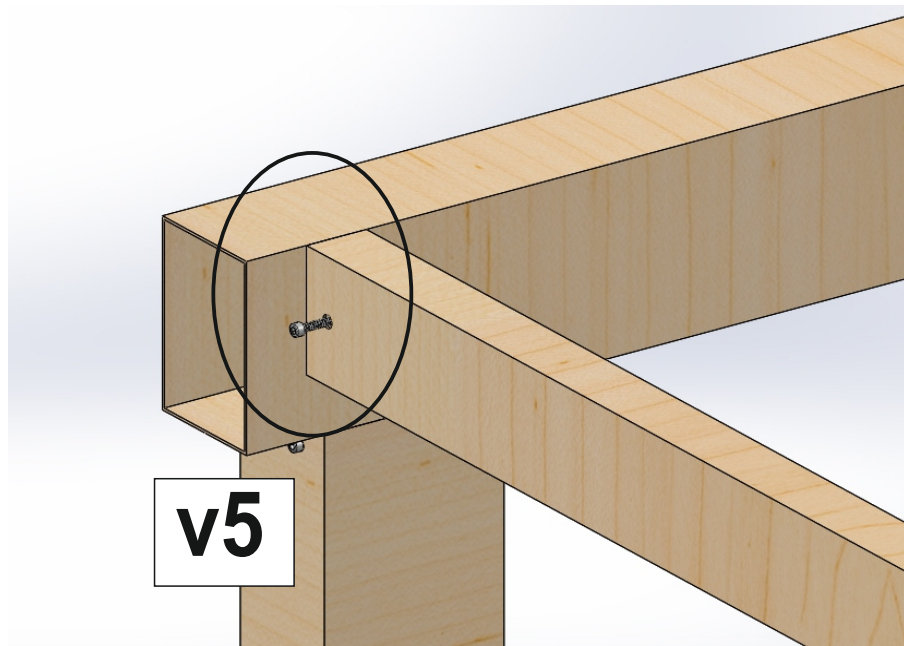


Place and screw all the carrier profile to the front profile with the screw V5

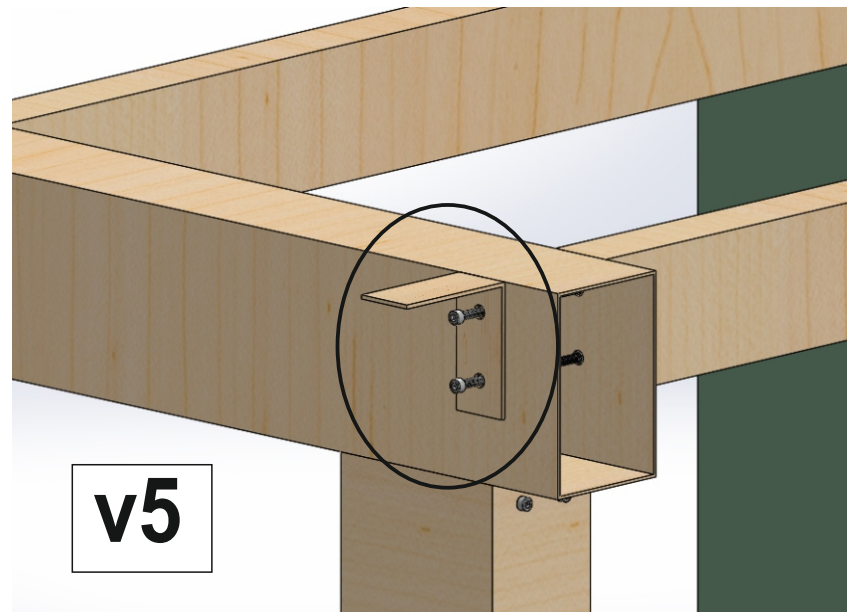

Place and install the front angle profile with V5

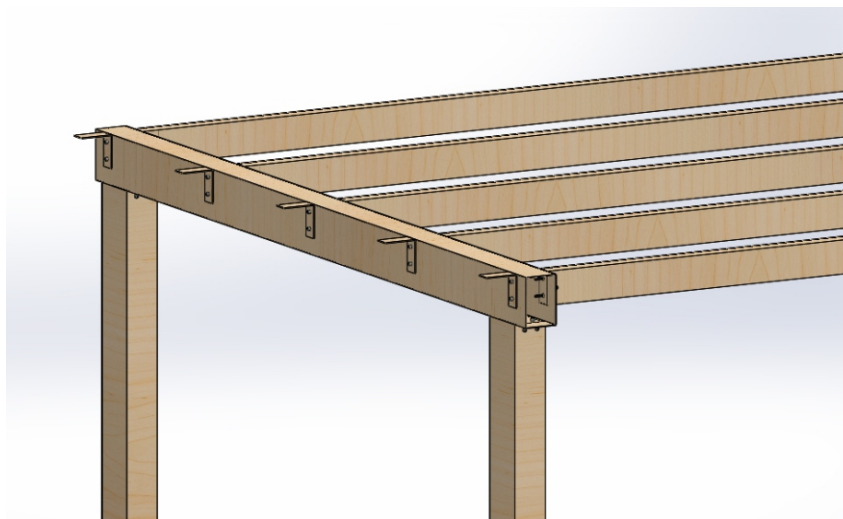

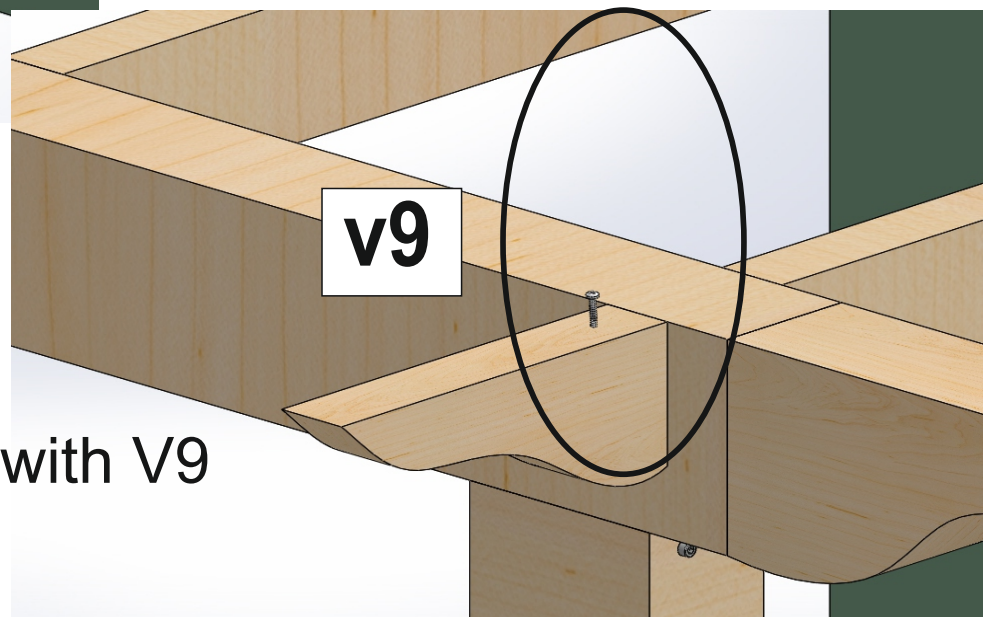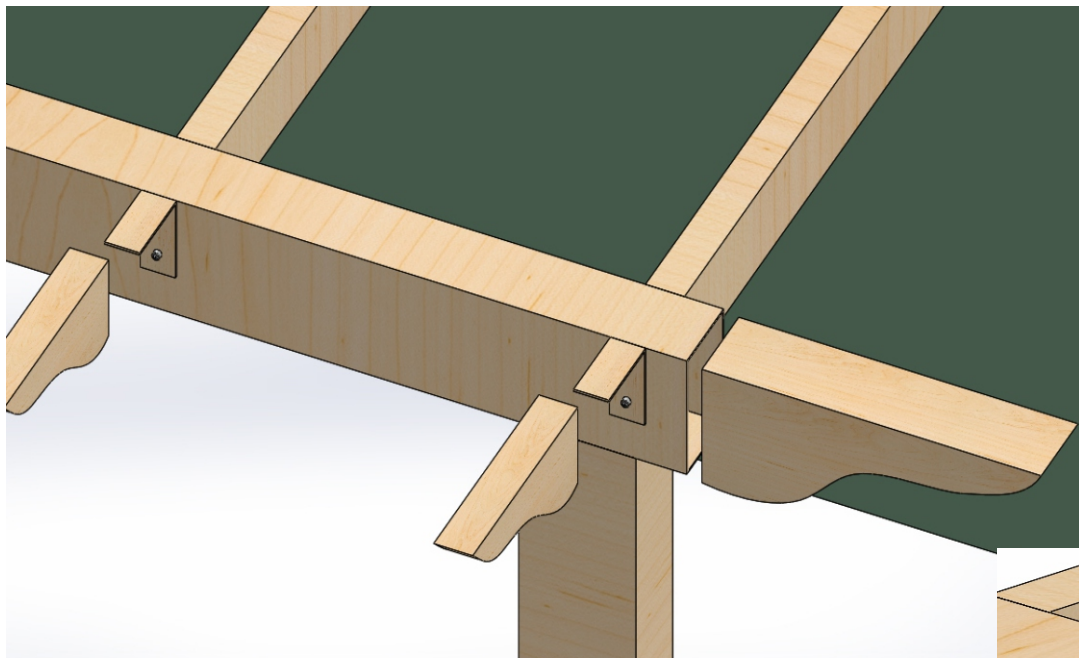


Place the cover cups and screw with V9


ASSEMBLY OF THE CURTAINS





Pass the ribbon from the guides

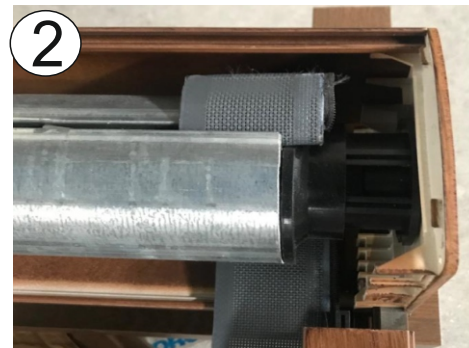

When the ribbon arrive to the motors place to the shaft

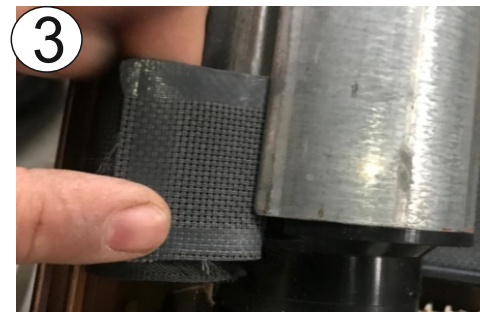

Insert the ribbon edges to the gap of the shaft

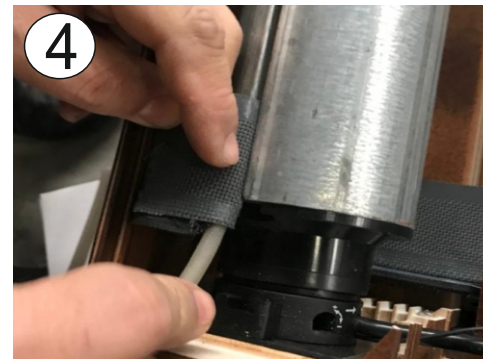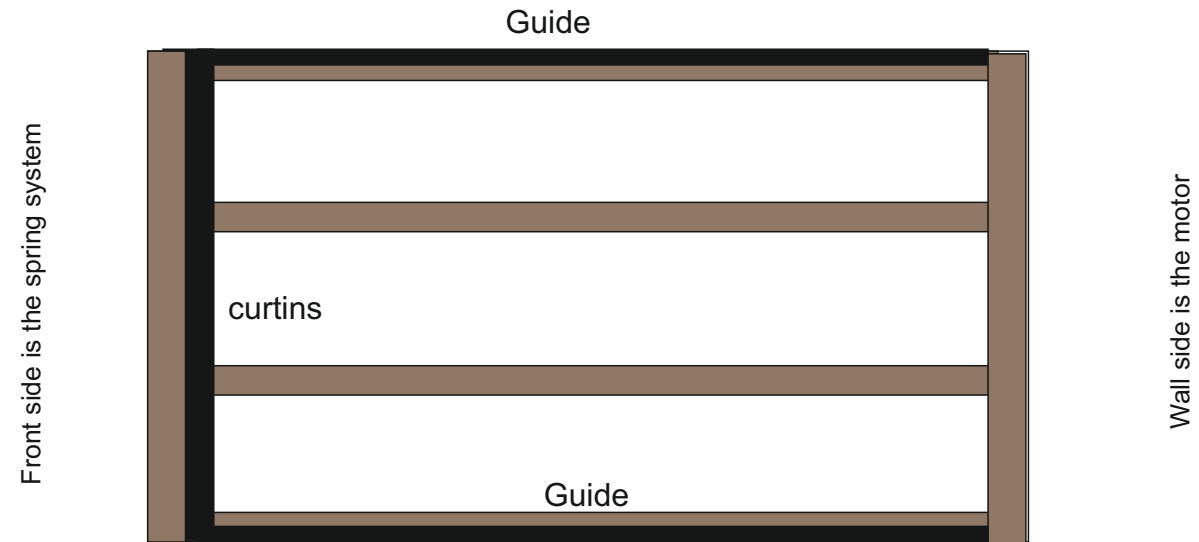

Apply the same both part of motor

The assembly will ready

*Connect 220VAC .

*Control with the remote control

*Finally close the cover cups
of motor and spring boxes